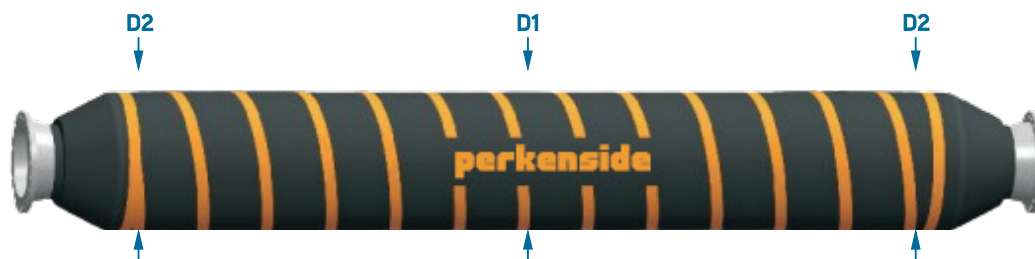


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series

Reeling Hose

Type 1620 F RT **Mainline Hose**


Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
			Weight in Air Full of Sea Water (kg)			
	D1 Body	D2 End	9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	600	620	1337 2005	1521 2306	1693 2589	1.8
400 (16")	760	780	1905 2991	2168 3444	2414 3869	2.4
500 (20")	890	910	2569 4292	2926 4952	3261 5571	3.0
600 (24")	1040	1060	3352 5859	3829 6777	4276 7637	3.6

- Single Carcass Hose **perkenside** Mainline to be used as the main floating hose in the string
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested