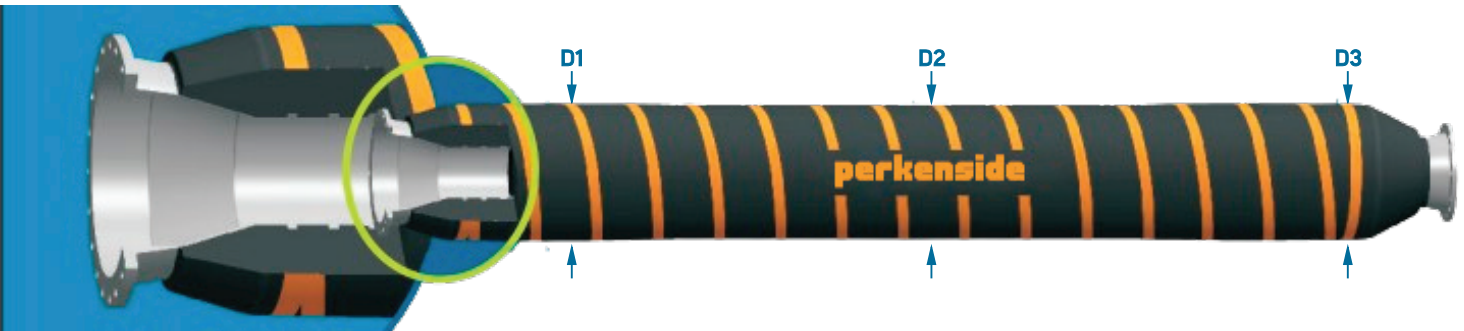


GMPHOM 2009**RT REINFORCED SINGLE CARCASS 15 bar 1000 Series****Reeling Hose****Type 1630 F RT Reducer Hose**

Nominal Bore (mm)	Outside Diameter (mm)			Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	Weight in Air Full of Sea Water (kg)			
				9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
400/300 (16"/12")	780	600	620	1343 2011	1528 2314	1701 2597	1.8
500/400 (20"/16")	910	760	780	1939 3025	2207 3484	2458 3914	2.4
600/500 (24"/20")	1060	900	920	2601 4324	2964 4990	3303 5613	3.0

- Single Carcass Hose **perkenside** Reducer Bore for use to connect larger mainline hose to smaller tail hose
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested