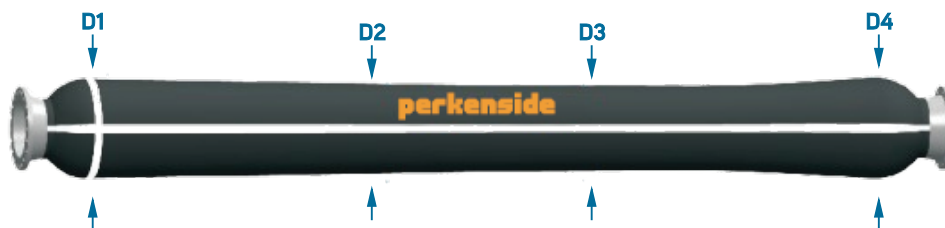


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series

Reeling Hose

Type 1631 S RT **One Reinforced End Hose**


Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	D4	Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	660	455	430	650	1358 476	1551 536	1733 593	1.2
400 (16")	760	555	540	750	1842 698	2100 783	2342 862	1.6
500 (20")	860	655	640	850	2452 952	2797 1070	3121 1181	2.0
600 (24")	910	795	755	890	3262 1304	3731 1473	4171 1631	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose to be used on FPSO connections
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested