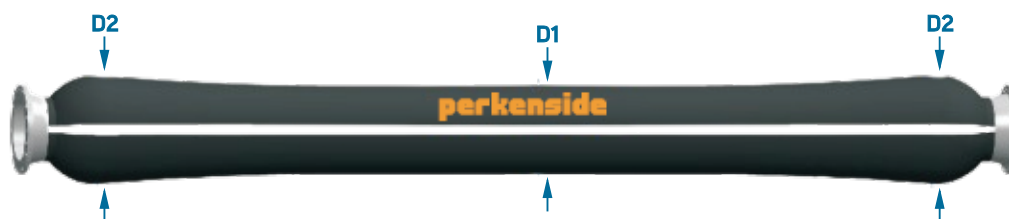


RT REINFORCED SINGLE CARCASS 15 bar 1000 Series

Reeling HoseType 1632 S RT **Mainline Hose**

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Submerged Weight Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	430	650	1251 429	1420 476	1579 520	1.2
400 (16")	540	750	1716 634	1944 700	2158 762	1.6
500 (20")	640	850	2301 865	2610 957	2899 1042	2.0
600 (24")	755	890	3082 1183	3508 1315	3908 1439	2.4

- Single Carcass Hose **perkenside** Mainline Submarine Hose for use as the main submarine hose in the string to be connected between reel and the Tanker on reeling systems
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested