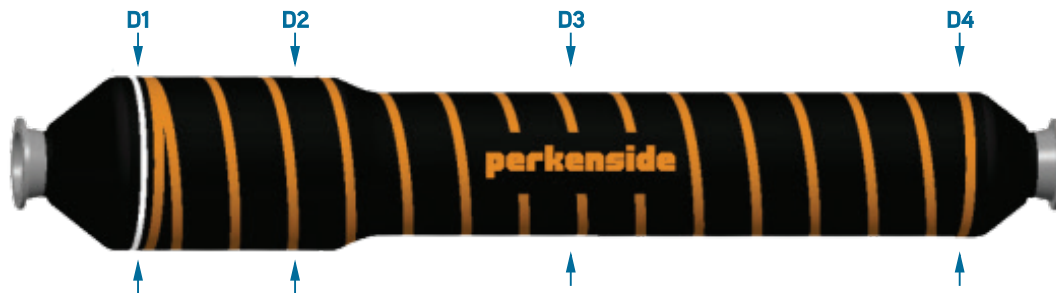


RT REINFORCED SINGLE CARCASS 19 bar 1000 Series Reeling Hose**Type 1710 F RT First Off FPSO HOSE**

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 End	D2 Body	D3 Body	D4 End	Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	800	730	630	650	1797 2465	2056 2842	2299 3195	1.8
400 (16")	960	890	790	810	2437 3523	2785 4061	3110 4566	2.4
500 (20")	1090	1020	920	940	3158 4881	3607 5633	4028 6338	3.0
600 (24")	1220	1200	1060	1080	4167 6674	4771 7719	5338 8699	3.6

- Single Carcass Hose **perkenside** One End Reinforced to be used in the FPSO Offloading connection
- Identified by one circumferential white band at the reinforced end
- The hose can be supplied with reinforcement at both ends or fully reinforced
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% including the weight of ancillary equipment or as requested
- Electrical Continuity: Continuous or as requested