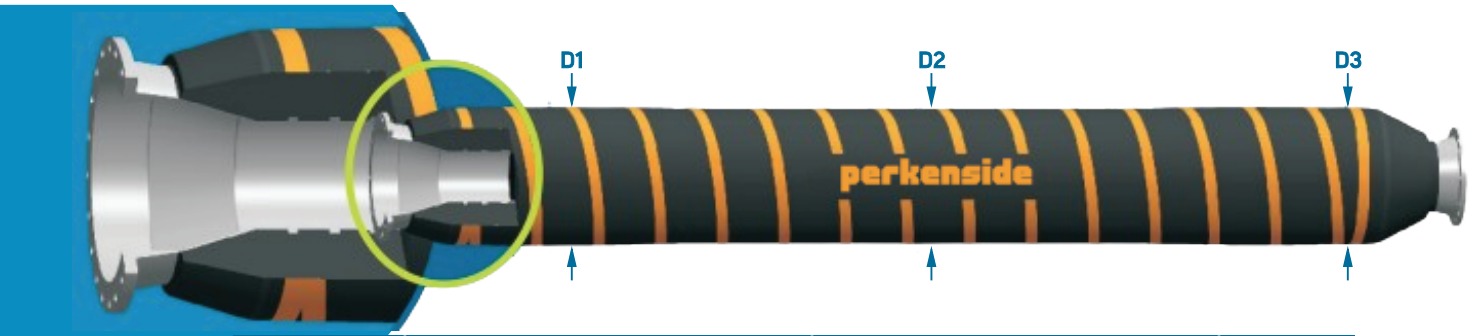


GMPHOM 2009**RT REINFORCED SINGLE CARCASS 19 bar 1000 Series****Reeling Hose****Type 1730 F RT Reducer Hose**

Nominal Bore (mm)	Outside Diameter (mm)			Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	Weight in Air Full of Sea Water (kg)			
				9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
400/300 (16"/12")	810	630	650	1439 2107	1630 2415	1809 2705	1.8
500/400 (20"/16")	940	790	810	2094 3180	2376 3652	2639 4095	2.4
600/500 (24"/20")	1080	920	940	2767 5275	3141 6089	3492 6853	3.0

- Single Carcass Hose **perkenside** Reducer Bore for use to connect larger mainline hose to smaller tail hose
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested