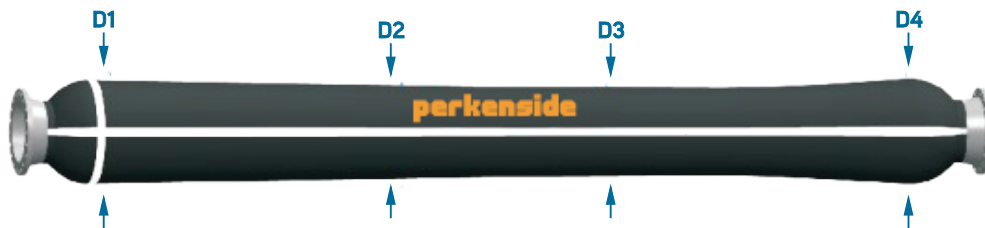


RT REINFORCED SINGLE CARCASS 19 bar 1000 Series **Reeling Hose**

Type 1731 S RT **One Reinforced End Hose**


Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	D4	Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	660	460	440	650	1542 595	1762 670	1968 740	1.2
400 (16")	760	565	550	750	2091 840	2385 942	2661 1038	1.6
500 (20")	860	665	650	850	2719 1122	3101 1259	3460 1388	2.0
600 (24")	910	795	765	890	3665 1520	4192 1713	4687 1893	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose to be used on FPSO connections
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested