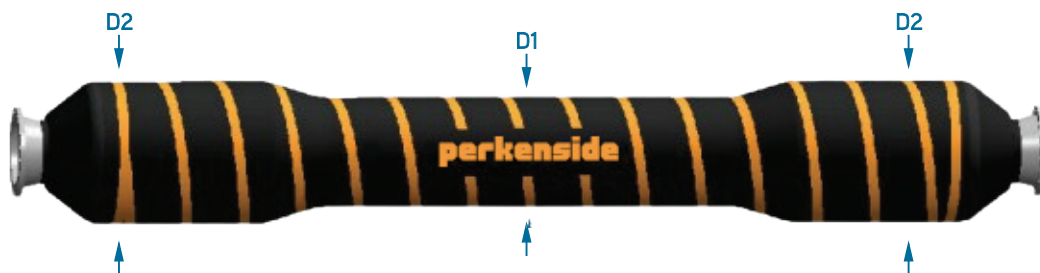


RT REINFORCED SINGLE CARCASS 19 bar 1000 Series **Reeling Hose**

Type 1770 BC RT **Buoyancy Control Hose**


Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Weight in Air Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	510	650	1395 2063	1579 2365	1751 2647	1.8
400 (16")	620	810	2020 3106	2288 3565	2540 3996	2.4
500 (20")	720	940	2665 4388	3021 5047	3355 5665	3.0
600 (24")	850	1080	3583 6090	4078 7026	4542 7903	3.6

- Single Carcass Hose **perkenside** Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested