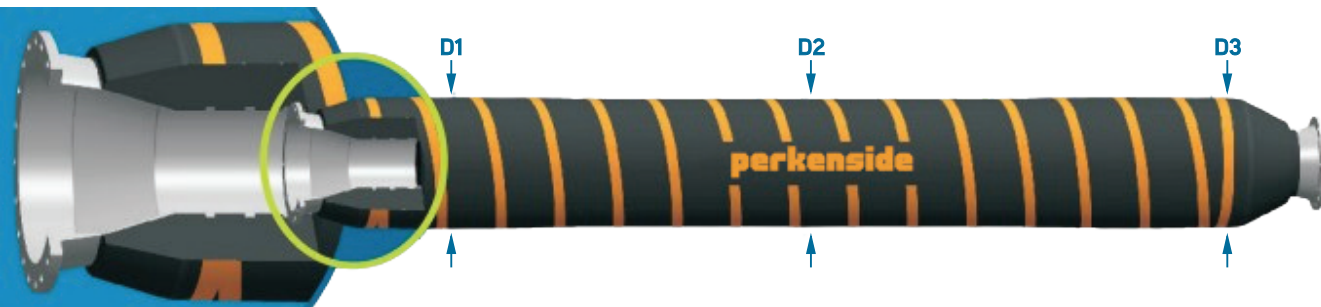


GMPHOM 2009**RT REINFORCED SINGLE CARCASS 21 bar 1000 Series****Reeling Hose****Type 1830 F RT Reducer Hose**

Nominal Bore (mm)	Outside Diameter (mm)			Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	Weight in Air Full of Sea Water (kg)			
				9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
400/300 (16"/12")	810	630	650	1483 2151	1680 2466	1865 2761	1.8
500/400 (20"/16")	940	790	810	2159 3245	2449 3726	2721 4177	2.4
600/500 (24"/20")	1080	920	940	2853 5360	3239 6186	3600 6961	3.0

- Single Carcass Hose **perkenside** Reducer Bore for use to connect larger mainline hose to smaller tail hose
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Continuous or as requested