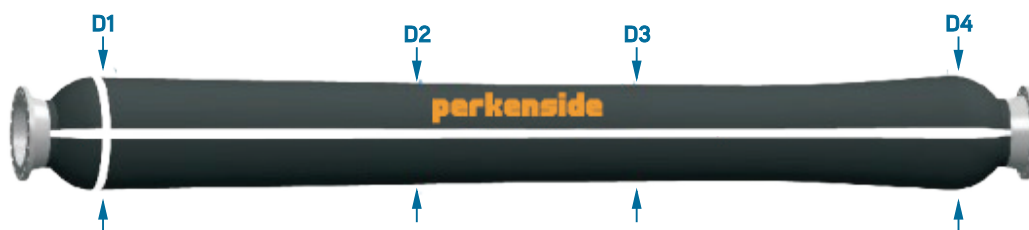


RT REINFORCED SINGLE CARCASS 21 bar 1000 Series

Reeling Hose

Type 1831 S RT **One Reinforced End Hose**


Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1	D2	D3	D4	Submerged Weight Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	660	460	440	650	1550 598	1771 673	1978 744	1.2
400 (16")	760	565	550	750	2101 844	2397 947	2674 1043	1.6
500 (20")	860	665	650	850	2732 1128	3117 1266	3477 1395	2.0
600 (24")	910	795	765	890	3683 1528	4213 1721	4710 1903	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose to be used on FPSO connections
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested