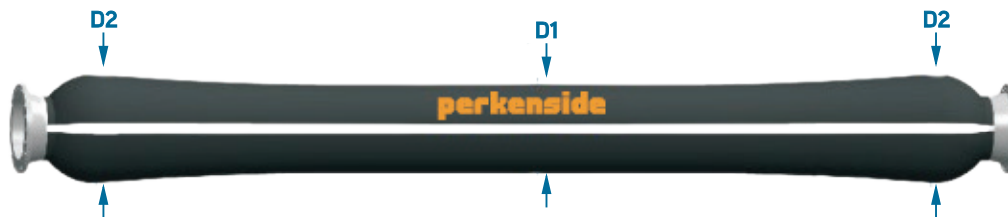


RT REINFORCED SINGLE CARCASS 21 bar 1000 Series

Reeling Hose

Type 1832 S RT **Mainline Hose**


Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End	Submerged Weight Full of Sea Water (kg)			
			9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
300 (12")	440	650	1376 492	1557 538	1726 582	1.2
400 (16")	550	750	1895 710	2142 776	2374 838	1.6
500 (20")	650	850	2489 960	2815 1050	3121 1134	2.0
600 (24")	765	890	3394 1309	3854 1440	4286 1564	2.4

- Single Carcass Hose **perkenside** Mainline Submarine Hose for use as the main submarine hose in the string to be connected between reel and the Tanker on reeling systems
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested