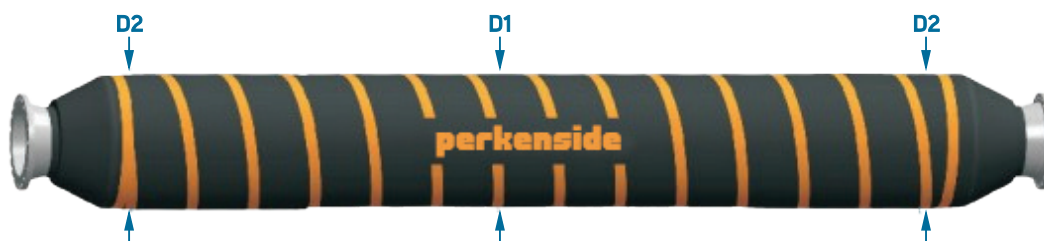


## RT REINFORCED SINGLE CARCASS 21 bar 1000 Series

**Reeling Hose****Type 1840 F RT Tail Hose**

Nominal Bore (mm)	Outside Diameter (mm)		Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1  Body	D2  End	Weight in Air Full of Sea Water (kg)			
			9.1m  (30ft)	10.7m  (35ft)	12.2m  (40ft)	
300 (12")	630	650	1610 2278	1832 2617	2039 2935	1.8
400 (16")	790	810	2227 3313	2531 3808	2817 4273	2.4
500 (20")	920	940	2909 4632	3307 5334	3681 5991	3.0
600 (24")	1060	1080	3789 6296	4318 7266	4813 8174	3.6

- Single Carcass Hose **perkenside** Tail for use to connect the end connection hose and the main floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested