


SUBMARINE SINGLE CARCASS 15 bar 1000 Series

Type 1621S One Reinforced End Hose With Location Collars

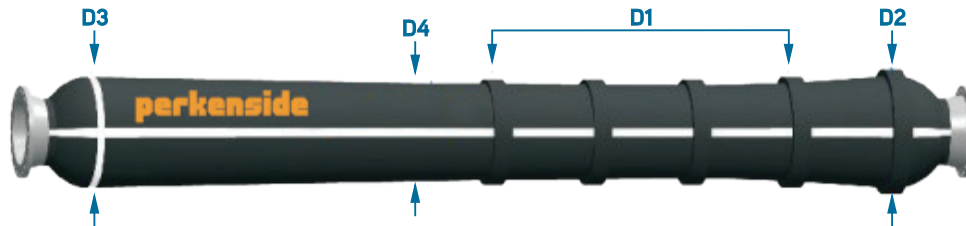

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)			
	D1 Body	Collar	D2 End	D3 End	Hose	D4 Body	Submerged Weight Full of Sea Water (kg)				
							9.1m (30ft)		10.7m (35ft)	12.2m (40ft)	
150 (6")	310		420		350		275	610 197	698 221	776 242	0.6
200 (8")	370		471		405		330	788 262	902 293	1001 321	0.8
250 (10")	420		581		470		385	1043 364	1188 404	1317 441	1.0
300 (12")	471		581		530		440	1308 507	1490 565	1654 619	1.2
400 (16")	581		697		625		535	1803 744	2050 826	2269 901	1.6
500 (20")	697		799		740		645	2396 1013	2726 1127	3020 1232	2.0
600 (24")	799		946		855		755	3118 1360	3551 1520	3940 1668	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested