


SUBMARINE SINGLE CARCASS 15 bar 1000 Series

Type 1631S One Reinforced End Hose

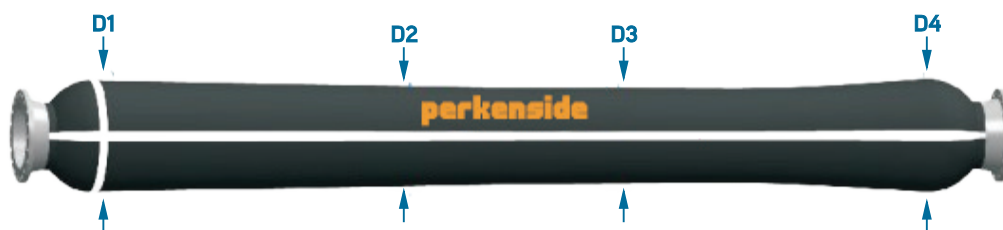

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 End	D2 Body	D3 Body	D4 End	Submerged Weight Full of Sea Water (kg)	9.1m (30ft)	10.7m (35ft)	12.2m (40ft)
150 (6")	350	275	250	340	583 193	666 216	744 238	0.6
200 (8")	405	330	305	395	755 257	861 288	960 316	0.8
250 (10")	470	385	360	460	998 358	1135 397	1264 434	1.0
300 (12")	530	440	415	520	1272 502	1446 559	1610 613	1.2
400 (16")	625	535	505	615	1745 736	1978 816	2198 892	1.6
500 (20")	740	645	620	730	2326 1004	2639 1116	2933 1221	2.0
600 (24")	855	755	730	840	3036 1349	3451 1507	3840 1655	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection
- Rated Working Pressure: 15 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested