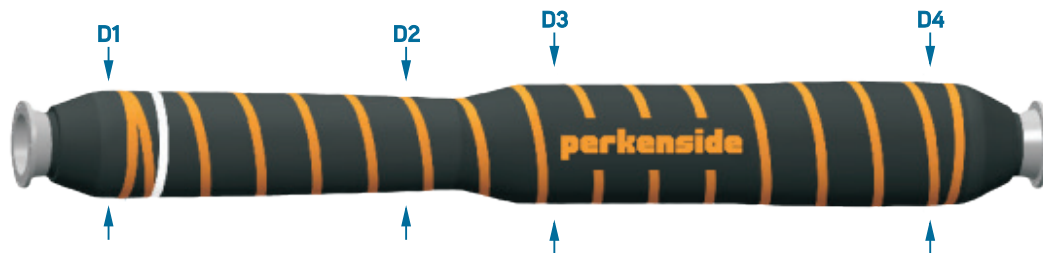


FLOATING SINGLE CARCASS 19 bar 1000 Series**Type 1710F First Off Buoy Hose**

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 End	D2 Body	D3 Body	D4 End	Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	375	295	375	410	736 905	843 1042	944 1171	0.9
200 (8")	430	345	460	495	944 1240	1081 1429	1208 1605	1.2
250 (10")	495	405	545	585	1244 1698	1421 1955	1587 2196	1.5
300 (12")	565	470	610	655	1604 2273	1836 2621	2052 2948	1.8
400 (16")	665	540	760	810	2176 3262	2486 3763	2777 4233	2.4
500 (20")	775	655	895	950	2820 4543	3221 5247	3596 5907	3.0
600 (24")	905	780	1075	1135	3788 6295	4338 7285	4853 8215	3.6

- Single Carcass Hose **perkenside** One End Reinforced for use in the first off the buoy position
- Identified by one circumferential white band at the reinforced end
- The hose can be supplied with reinforcement at both ends or fully reinforced
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 5% or as requested
- Electrical Continuity: Continuous or as requested