


SUBMARINE SINGLE CARCASS 19 bar 1000 Series

Type 1721S One Reinforced End Hose With Location Collars

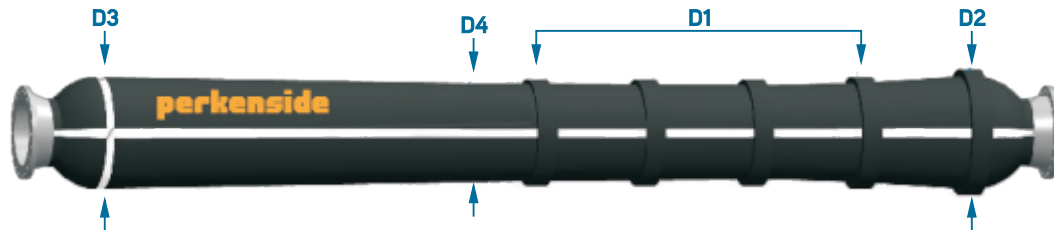

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)				
	D1 Body	Collar	D2 End	D3 End	Hose	D4 Body	Submerged Weight Full of Sea Water (kg)					
							9.1m (30ft)		10.7m (35ft)	12.2m (40ft)		
150 (6")	310		420			350		275	610 197	698 221	776 242	0.6
200 (8")	370		471			415		335	818 268	936 300	1041 329	0.8
250 (10")	420		581			475		390	1076 370	1227 412	1362 450	1.0
300 (12")	471		581			535		445	1346 515	1535 574	1706 629	1.2
400 (16")	581		697			630		540	1848 751	2103 835	2330 912	1.6
500 (20")	697		799			745		650	2449 1022	2789 1138	3093 1245	2.0
600 (24")	799		946			860		765	3184 1375	3627 1537	4029 1687	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested