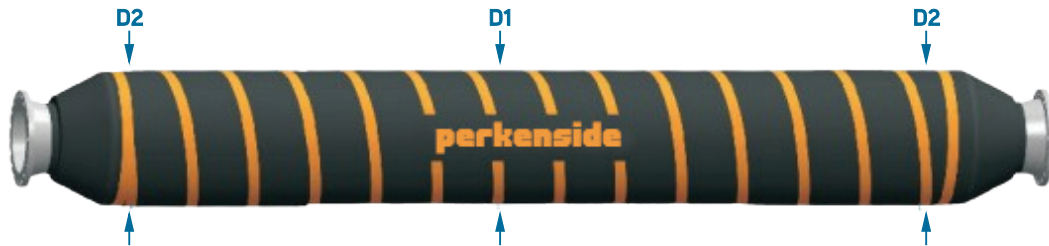


FLOATING SINGLE CARCASS 19 bar 1000 Series**Type 1740F Tail Hose**

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	370	390	-	-	594 763	677 896	755 982	0.9
200 (8")	425	455	-	-	794 1090	905 1253	1008 1405	1.2
250 (10")	510	545	-	-	1056 1510	1201 1735	1336 1945	1.5
300 (12")	570	605	-	-	1333 2001	1515 2301	1686 2581	1.8
400 (16")	715	755	-	-	1845 2931	2093 3370	2326 3781	2.4
500 (20")	850	895	-	-	2451 4175	2783 4809	3094 5404	3.0

- Single Carcass Hose **perkenside** Tail for use to connect the tanker rail hose and the floating string
- This hose has flexibility enough to support seawater conditions during offloading
- Rated Working Pressure: 19 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: 20% or as requested
- Electrical Continuity: Discontinuous or as requested