


SUBMARINE SINGLE CARCASS 21 bar 1000 Series

Type 1821S One Reinforced End Hose With Location Collars

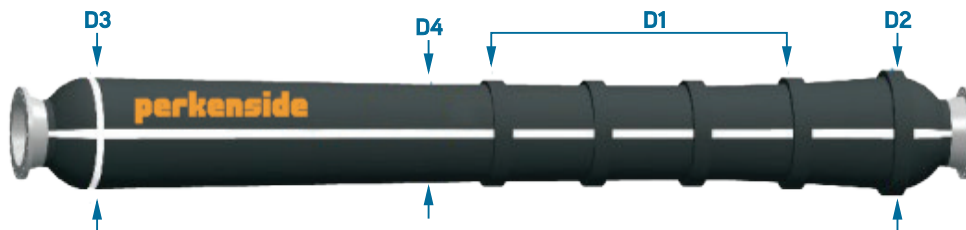

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)			
	D1 Body	Collar End	D2 End	D3 End	Hose Body	Submerged Weight Full of Sea Water (kg)					
						9.1m (30ft)	10.7m (35ft)		12.2m (40ft)		
150 (6")	310		420		355		280	635 202	727 227	809 249	0.6
200 (8")	370		471		415		335	818 268	936 300	1041 329	0.8
250 (10")	420		581		475		390	1076 370	1227 412	1362 450	1.0
300 (12")	471		581		540		455	1384 521	1580 582	1757 638	1.2
400 (16")	581		697		635		545	1895 761	2158 846	2393 925	1.6
500 (20")	697		799		750		655	2505 1034	2854 1151	3169 1260	2.0
600 (24")	799		946		870		775	3311 1399	3778 1566	4203 1720	2.4

- Single Carcass Hose **perkenside** One Reinforced End Submarine Hose for use to connect sea bed manifold or buoy connection used on monobuoy systems
- Supplied with float location collars
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 4D (up to 2D without any permanent deformation)
- Electrical Continuity: Discontinuous or as requested