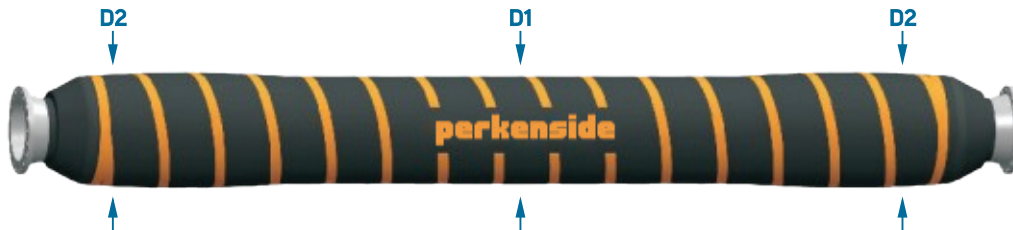


FLOATING SINGLE CARCASS 21 bar 1000 Series**Type 1870BC Buoyancy Control Hose**

Nominal Bore (mm)	Outside Diameter (mm)				Weight in Air Empty (kg)			Minimum Bending Radius (m)
	D1 Body	D2 End			Weight in Air Full of Sea Water (kg)			
					9.1m (30ft)	10.7m (35ft)	12.2m (40ft)	
150 (6")	310	345	-	-	582 751	659 859	732 959	0.9
200 (8")	370	435	-	-	750 1046	849 1197	941 1338	1.2
250 (10")	450	525	-	-	1027 1481	1162 1696	1288 1897	1.5
300 (12")	515	565	-	-	1284 1953	1454 2239	1612 2508	1.8
400 (16")	640	690	-	-	1859 2945	2106 3383	2338 3794	2.4
500 (20")	750	805	-	-	2453 4176	2781 4807	3088 5398	3.0
600 (24")	905	930	-	-	3358 5865	3822 6770	4257 7618	3.6

- Single Carcass Hose **perkenside** Buoyancy Control for use as the second and third hose in the string
- Rated Working Pressure: 21 bar
- Minimum Bending Radius: 6D (up to 2D without any permanent deformation)
- Minimum Reserve Buoyancy: Neutral or as requested
- Electrical Continuity: Continuous or as requested